



# Protect your asset

1080p Full HD AIO Accessory Camera



## SDC-9441BC

1080p Full HD Weatherproof IR Camera

- 1080p Full high definition resolution
- Wide angle field of view
- 3-Dimensional noise reduction for clear video quality at low light conditions
- True Day & Night with ICR for perfect color reproduction
- IP66 weather resistant
- Night vision up to 82ft (25m)



## Kit Contents


- Camera (SDC-9441BC) 1pcs
- 60ft BNC Camera Cable 1pcs
- Plastic Anchors / Screws
- User Manual

## SDC-9441BC

| VIDEO                            |                                                                      |
|----------------------------------|----------------------------------------------------------------------|
| Imaging Device                   | 1/2.9" 2M CMOS                                                       |
| Effective Pixels                 | 1920(H) x 1080(V)                                                    |
| Scanning System                  | Progressive, 30fps (NTSC) / 25fps (PAL)                              |
| Synchronization                  | Internal                                                             |
| Min. Illumination                | 0Lux (IR LED on)                                                     |
| Camera Output                    | 1CH BNC, Maximum Transmission Length : 300m (75Ω 3C2V)               |
| Min. Cable Length                | 60ft (18.3m) included                                                |
| LENS                             |                                                                      |
| Focal Length                     | 4mm                                                                  |
| Max. Aperture Ratio              | F2.1                                                                 |
| Angular Field of View            | H : 72.2° / V : 52.9° (Tolerance range ±6%)                          |
| OPERATIONAL                      |                                                                      |
| Shutter Mode                     | Auto (Rolling shutter)                                               |
| Gain Control                     | Auto                                                                 |
| White Balance                    | Auto (1,800°K ~ 10,500°K)                                            |
| Digital Noise Reduction          | 3D DNR                                                               |
| Flickerless                      | Auto                                                                 |
| Day & Night                      | True Day/Night with ICR                                              |
| IR Distance                      | 25m (82ft)                                                           |
| ENVIRONMENTAL                    |                                                                      |
| Operating Temperature / Humidity | -10°C ~ +50°C (+14°F ~ +122°F) / Less than 90% RH                    |
| Ingress Protection               | IP66                                                                 |
| ELECTRICAL                       |                                                                      |
| Input Voltage                    | 12V DC                                                               |
| Power Consumption                | Max. 3.7W                                                            |
| MECHANICAL                       |                                                                      |
| Color / Material                 | Front : Gray silver / PC, Body : White / PC, Bracket : White / ADC12 |
| Dimensions (WxHxD)               | 142.6 x 61.9 x 61.8mm (5.61" x 2.44" x 2.43")                        |
| Weight                           | 191g (0.42 lb)                                                       |
| MECHANICAL                       |                                                                      |
| Dimensions (WxHxD)               | 276.0 x 106.0 x 78.0mm (10.87" x 4.17" x 3.07")                      |
| Weight                           | 720g (1.59 lb)                                                       |

## Dimensions

Unit : mm (inch)

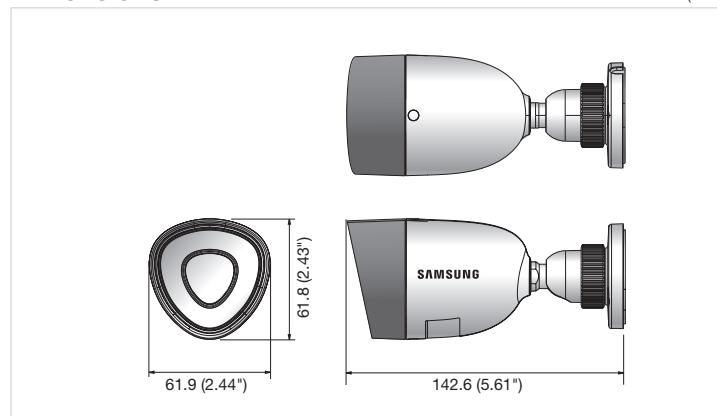

Design and specifications are subject to change without notice.



The Eco mark represents Hanwha Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

## HEAD OFFICE

6, Pangyo-ro 319beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, SEOUL 463-400 Rep. of KOREA  
 Tel : +82-70-7147-8753, 8764 Fax : +82-31-8018-3740 www.samsungsecurity.com www.samsungcctv.com  
 COPYRIGHT BY HANWHA TECHWIN. ALL RIGHT RESERVED

**SAMSUNG TECHWIN AMERICA INC.**  
 100 Challenger Rd, Suite 700 Ridgeland Park, NJ 07660  
 Toll Free : +1-877-213-1222 Direct : +1-201-325-6920  
 Fax : +1-201-373-0124  
 www.samsungsv.com

**SAMSUNG TECHWIN EUROPE LTD.**  
 2nd Floor, No. 5 The Heights, Brooklands, Weybridge,  
 Surrey, KT13 0NY, UK  
 Tel : +44-1932-82-6700 Fax : +44-1932-82-6701  
 www.samsungsecurity.co.uk

**SHANGHAI SAMSUNG TECHWIN CO., LTD.**  
 32F, Bldg B, New Caohejing International Business Center,  
 No. 391 Gulping Rd., Shanghai, China, 200233  
 Tel : +86-21-5427-1155 Fax : +86-21-5423-5122  
 www.samsungsecurity.cn

