

HAY-METRO 230V & HAY-METRO LV (12Vdc/24Vac)



HAY-METRO 230 (230v) & HAY-METRO LV (12v / 24v Dual Voltage Heater)

Fully Cable Managed CCTV Camera Housing
Side Opening for Ease of Installation & Maintenance

Weather Proof to IP67



3 Year Anti-Corrosion Warranty

Manufactured From Die Cast Aluminium

Quick Release Removable Top

Low Power Consumption with dual voltage heater. 12v =1.2A - 24vAC =600Ma

Dimensions:

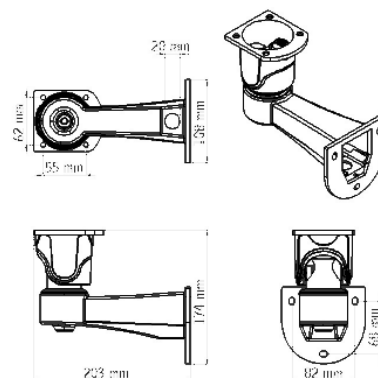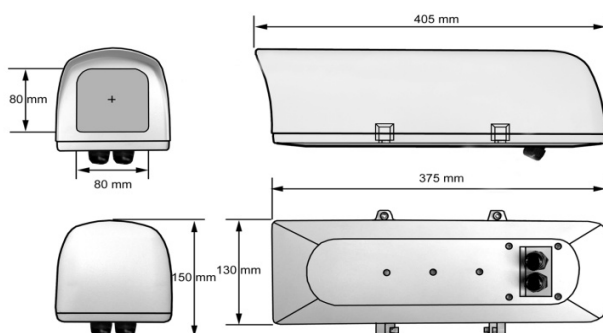

Accessories:



HAY-METRO Corner Mount
Corner wall mount allowing the Metro housing to be mounted on The corner of a building




HAY-POLEMOUNT
Polemount adapter for the METRO Polemount adapter for the METRO C/W 2 Clamps for pole sizes 67mm to 127mm & 83mm to 178mm.



HAY-METRO-CEILING-BRKT "J" Type Ceiling bracket for METRO
J Type bracket allowing the METRO To be suspended from the ceiling. Allowing cable management (N.B. does not use the normal bracket for full cable management)



HAY-DUMMYKIT
Dummy Camera kit for the METRO Dummy camera module that mounts to the internal camera plate when a dummy camera is needed



HAY-METRO 450mm Extension arm
Metro bracket extension adds 450mm to the length of the bracket allowing the METRO to clear obstacles when mounting the housing.