

ACT 10

Product Overview

The ACT 10 digital keypad is a sturdy and durable unit made from vandal resistant die cast zinc with backlit stainless steel keys. This multi-purpose keypad caters for access control, door monitoring and interlock applications.

Main Features

- 10 User codes
- 2 Output relays
- 2 doors, 2 user groups
- Interlock, fire alarm input, door monitoring
- Surface or Flush mount options
- Indoor or outdoor (IP54)
- Zinc diecast housing, stainless steel keys
- Front and back tamper
- Backlit keypad

Installation / Specification Guidelines

- The ACT 10 requires an operating voltage of 12 to 24 volts AC or DC. For full functionality use 12 volts DC supply.
- 2 x 5 amp relay outputs
- The ACT 10 can be installed either indoors or outdoors (IP54)
- Operating Temperature: -10 to +50 C
- There are flush mounting and weather shield accessories available for this product


Digital Keypad

ACT

Access Control Technology



ACT 10

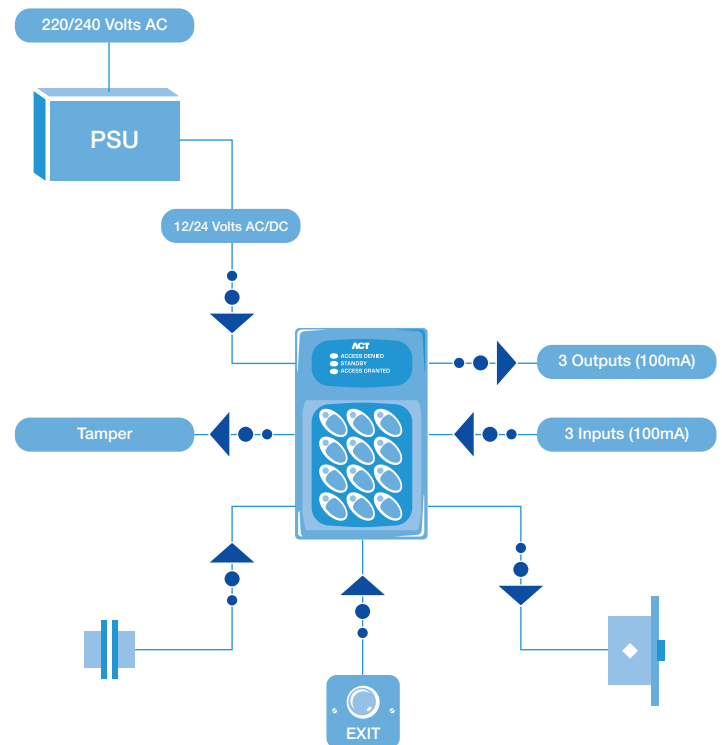

ACT 10 System Schematic

ACT 10

Product Specification

Operating Voltage:	12/24 Volts AC/DC
Current Consumption:	40/120 mA
Weight:	700 grams
Operating Temperature:	-10 to +50 C
Dimensions (HxWxD):	138 x 87 x 37 mm
Mounting:	Surface or Flush
Installation:	Indoor or Outdoor

Digital Keypad

ACT

Access Control Technology



ACT 10 Digital Keypad

ACT 10 Flush Kit

Product Specification

Front Plate Dimensions (HxWxD):	185 x 130 x 3 mm
Back Box Dimensions (HxWxD):	150 x 90 x 40 mm
Weight:	750 grams

ACT 10 Weather Shield

Product Specification

Dimensions (HxWxD):	140 x 92 x 74 mm
Weight:	475 grams

ACT Standalone products comparison chart

Feature	ACT 5	ACT 5 Prox	ACT 10	ACTsmart2 1070	ACTsmart2 1080	ACTsmart2 1090
Doors	1	1	2	1	1	1
Users	10	50	10	1000	1000	1000
User Groups			2	1	1	1
Master Slave Operation				Yes	Yes	Yes
Proximity		Yes		Yes	Yes	
Pin	Yes	Yes	Yes		Yes	Yes
Pin & Prox		Yes			Yes	
Pin or Prox		Yes			Yes	
Keypad Backlighting	Yes	Yes	Yes		Yes	Yes
Interlock			Yes	Yes	Yes	Yes
Door Monitoring			Yes	Yes	Yes	Yes
Fire Alarm Override			Yes	Yes	Yes	Yes
Master Slave Operation				Yes	Yes	Yes
Toggle Mode	Yes	Yes	Yes	Yes	Yes	Yes
Door Relay Output	5 amp	5 amp	5 amp	5 amp	5 amp	5 amp
Programmable Inputs			2	1	1	1
Programmable Outputs			2			
Programmable Inputs/Outputs				2	2	2
Push to release button input	Yes	Yes	Yes	Yes	Yes	Yes
Tamper Output			Yes	Yes	Yes	Yes
12-24volt DC or AC Input*	Yes	Yes	Yes	Yes	Yes	Yes
IP Rating	IP67	IP67	IP54	IP67	IP67	IP67

* ACTsmart2 units require a DC supply when programmable input / outputs or master slave operation are used.



ACT 10
Flush Kit



ACT 10
Weather Shield