



G2 chart



PSTN Line for built in communicator



Common features for G2-20 and G2-44+

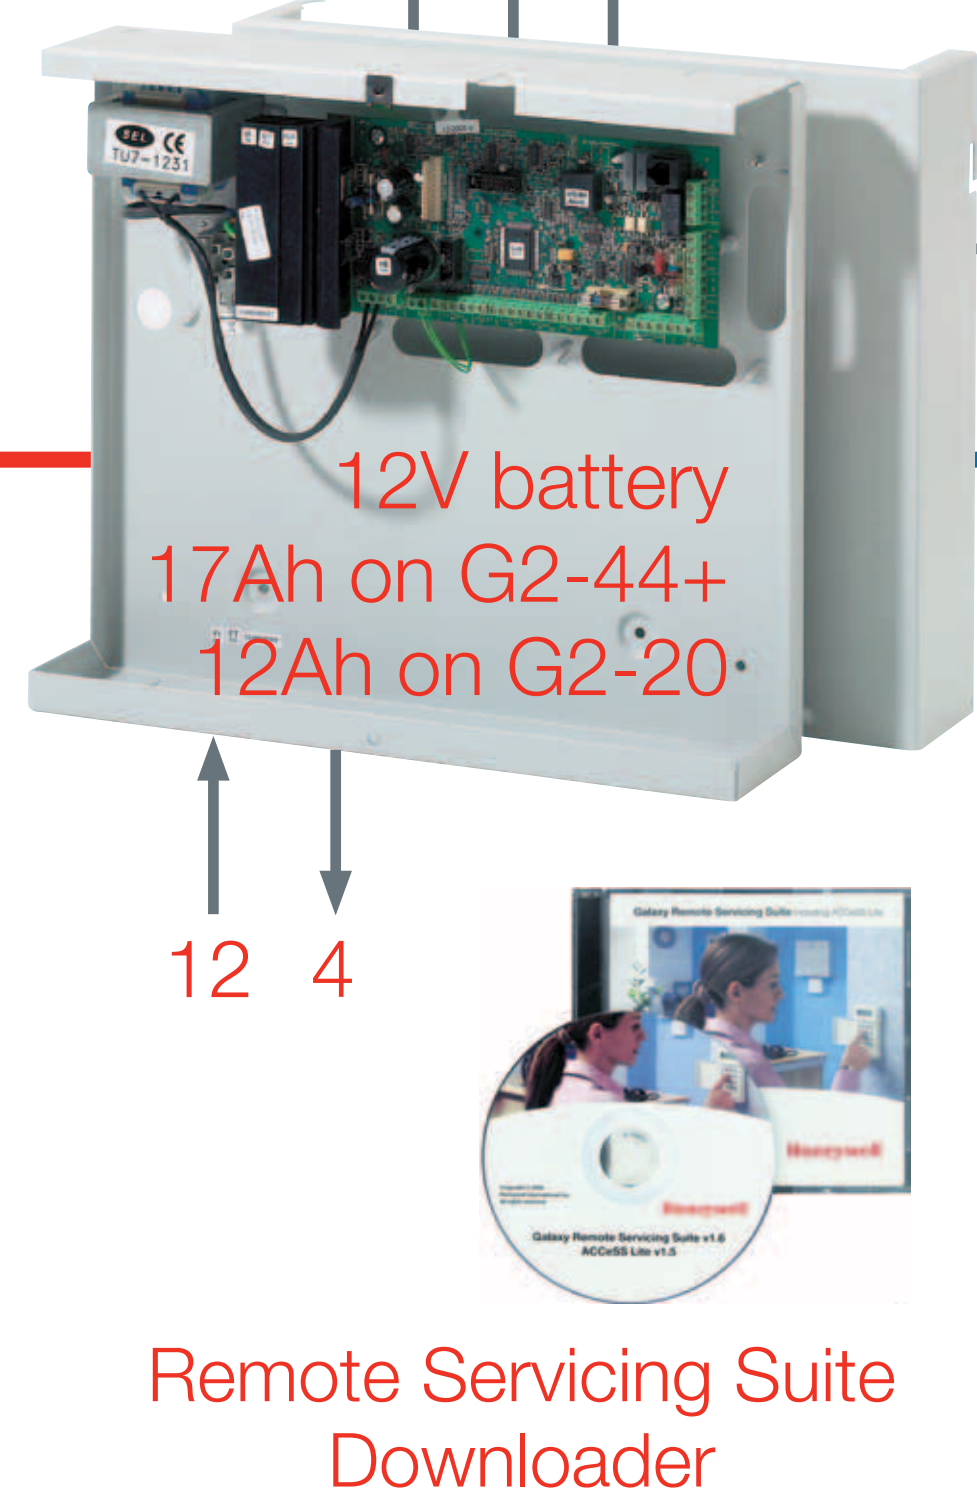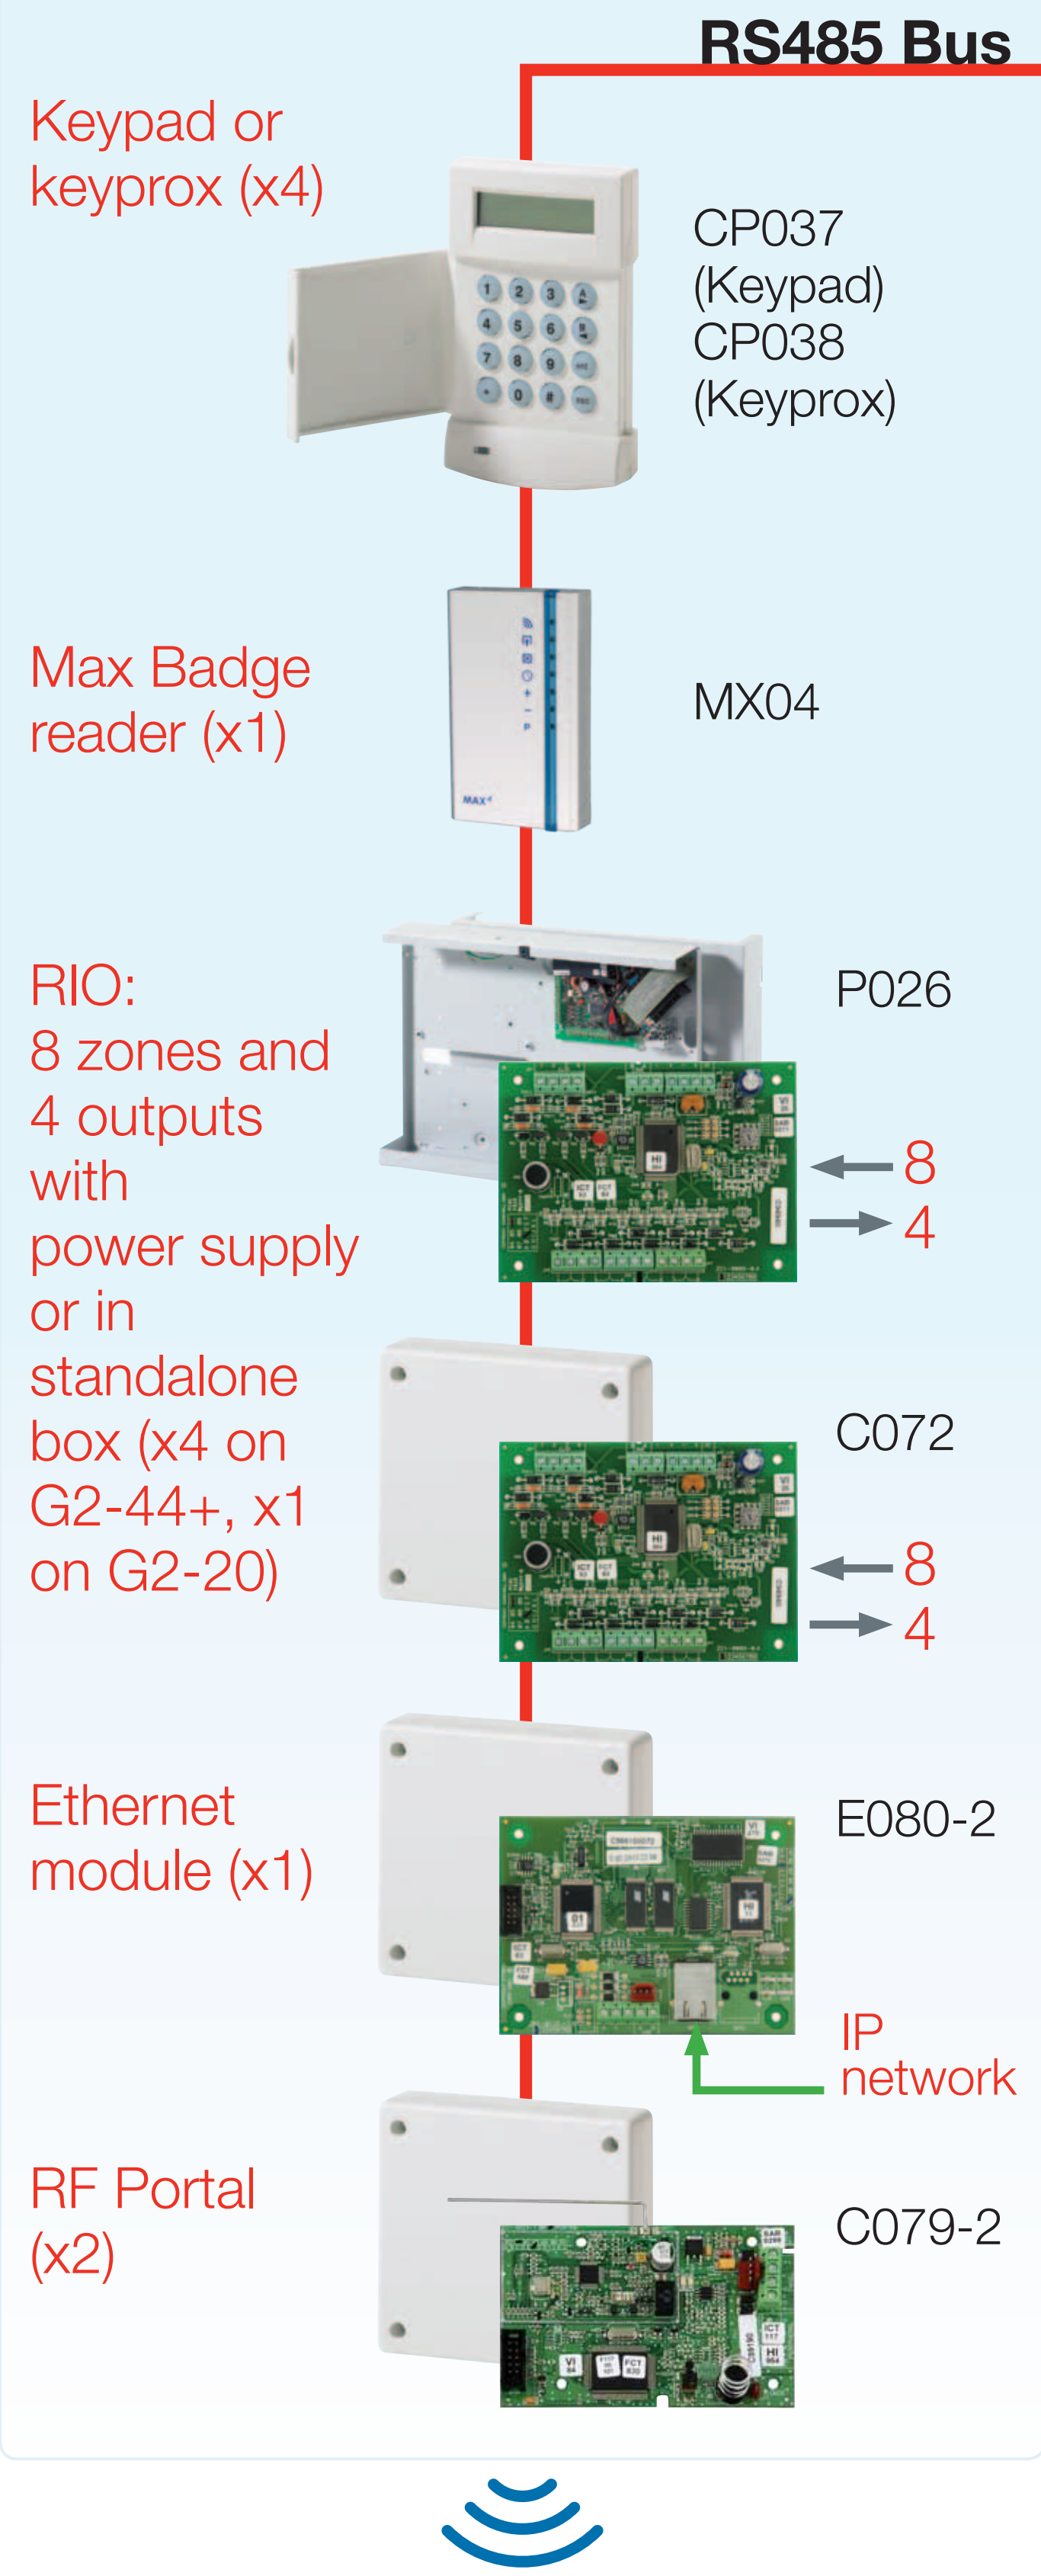


Two twisted pairs screened cable, Belden 8723 or equivalent. 1km maximum. (100m is using standard 4 core cable)

Standard 4-core cable, 100m Maximum. Star or daisy chain wiring structure

Honeywell wired series



Extra features for G2-44+ version

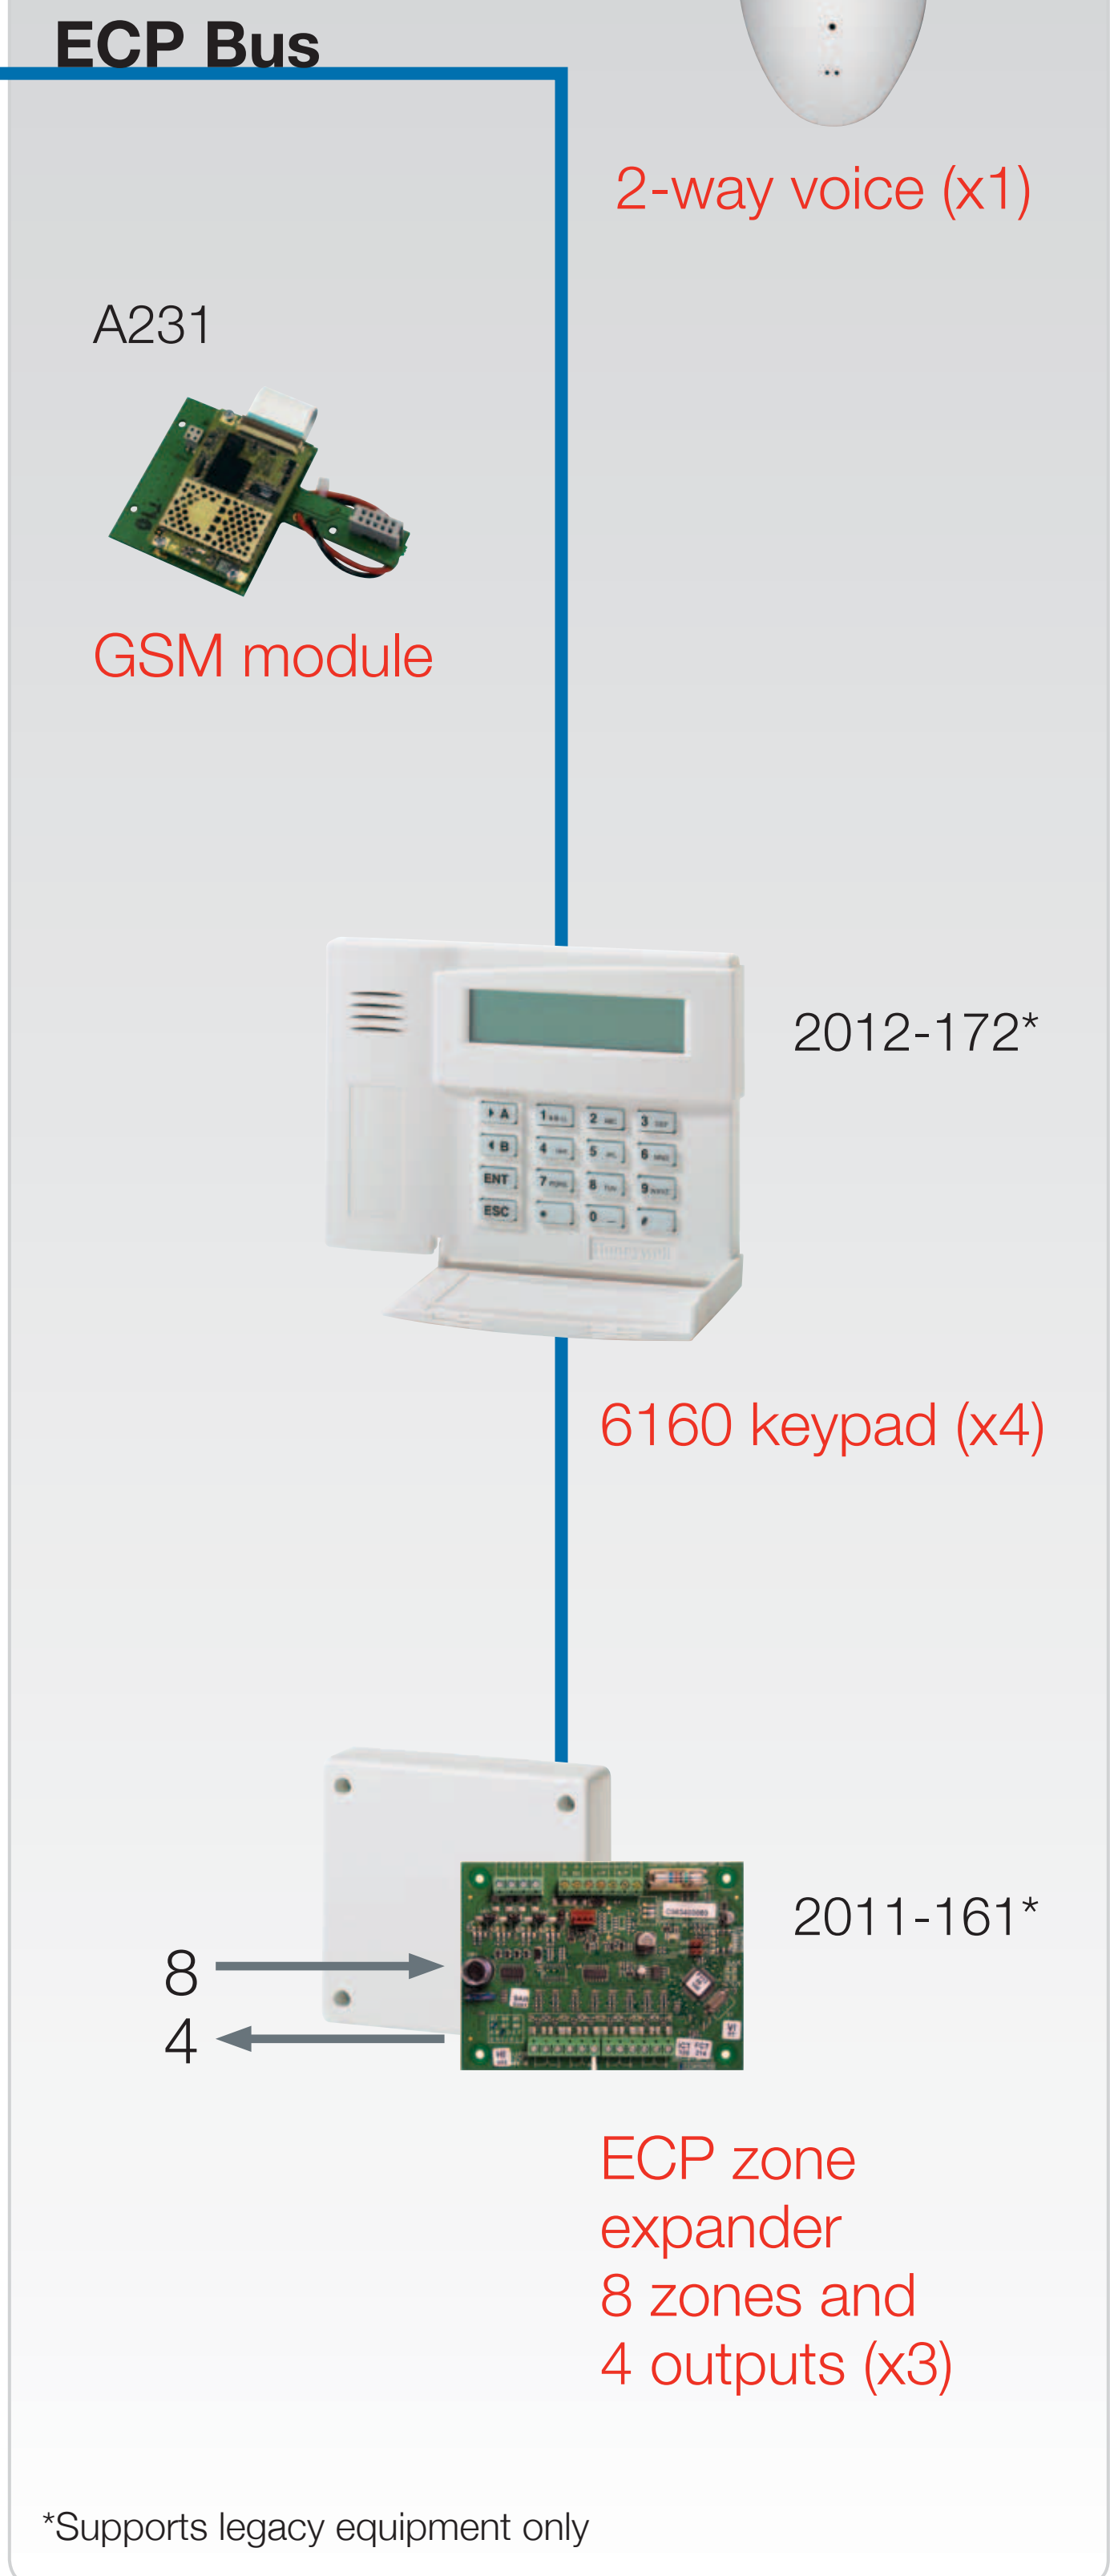

*Supports legacy equipment only

Wireless sensors range



NOTE: New sensors valid for G2 panel firmware from version V1.5 onwards. Compatible across the Galaxy® Range